# USB Cable

**Elivi USB A - B cable 2 meter**
2.0, Black

Product number: ELV-USB20AB-020B

## Product Description

USB A to B cable for transferring data between devices. Can be used between computer and printer, scanner, external hard drives or similar. The cable has USB standard 2.0 and allows data transfer up to 480 Mbps.

## Main Specifications

| | |
|---|---|
| **Brand** | Elivi |
| **Color** | Black |
| **Length (m)** | 2 |
| **Connector type 1** | USB2.0 AM |
| **Connector type 2** | USB2.0 BM |
| **Conductor material** | Copper |
| **USB version** | 2.0 |

## Extended Specifications

| | |
|---|---|
| **Active** | X |
| **AWG wire size** | 24+28 |
| **Transmission speed** | 480Mbps |
| **Jacket material** | PVC |
| **Anti-kink sleeve** | Moulded PVC |

Elivi
Gneisveien 30
2020 Skedsmokorset
Norway

T +47 22 90 37 00
W www.elivi.eu
M elivi@elivi.eu

Visit our website:

Imported and distributed by CBK Distribusjon AS

| | |
|---|---|
| **Inner Cast** | PE |
| **Halogenfree** | X |
| **Maximum power capacity (Ampere)** | 1 Ampere |
| **Connector contact plating** | Nickel plated |
| **Certifications** | CE, RoHS |

## Single packaging

| | |
|---|---|
| **Unit** | PCE |
| **Quantity** | 1 |
| **Splittable** | X |

Elivi
Gneisveien 30
2020 Skedsmokorset
Norway

T +47 22 90 37 00
W www.elivi.eu
M elivi@elivi.eu

Visit our website:

Imported and distributed by CBK Distribusjon AS

# Dimensional Sketches

| RevNo. | Revision note | Date | Signature | Checked |
|---|---|---|---|---|

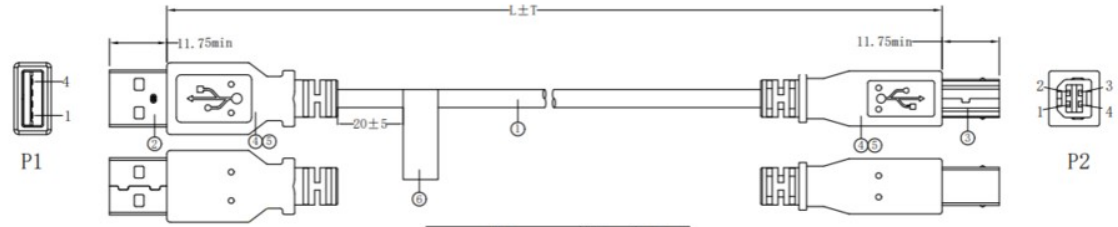


| P/N | L/mm | T/mm |
|---|---|---|
| 123888 ELV-USB20AB-005B | 500 | 10 |
| 123889 ELV-USB20AB-010B | 1000 | 20 |
| 123890 ELV-USB20AB-020B | 2000 | 30 |
| 123891 ELV-USB20AB-030B | 3000 | 40 |
| 123892 ELV-USB20AB-050B | 5000 | 60 |

PIN OUT




NOTES:
1. OPEN/SHORT/INTERMITTENCE:100%.
2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩMin
3. CONDUCTIVE RESISTANCE:5ΩMax
4. ROHS & REACH COMPLIANT

| NO. | MATERIAL | DESCRIPTION | QTY. | UNIT |
|---|---|---|---|---|
| ⑥ | LABEL | LABEL L*W=80*15 WHIT ELIVI LOGO | 1 | PCS |
| ⑤ | MOLDED | 45P BLACK PVC | | G |
| ④ | MOLDED | LDPE | | G |
| ③ | CONNECTOR | USB2.0 B MALE, GOLD PLATED PIN, WHITE INSULATION, NICKEL PLATED SHELL | 1 | PCS |
| ② | CONNECTOR | USB2.0 A MALE, GOLD PLATED PIN, WHITE INSULATION, NICKEL PLATED SHELL | 1 | PCS |
| ① | CABLE | 7/0.12TC*1P+7/0.20TC*2C+AL/MY+D(7/0.12BC)+B(48/0.12ALM), BLACK PVC JACKET OD:4.5±0.2mm MARKING:AWM STYLE 2725 80℃ 30V USB 2.0 High Speed Cable | L | MM |

| Itemref | Quantity | Title/Name, designation, material, dimension etc | Article NO./Reference |
|---|---|---|---|
| Designed by FLY | Checkde by HELEN | Approved by - date 2025.05.22 | File name | Date 2025.05.22 | Scale FREE |
| ANGLE: | | USB2.0 AM TO BM | |
| UNIT:MM | | Edition 1 | Sheet 1/1 |


Elivi
Gneisveien 30
2020 Skedsmokorset
Norway

T +47 22 90 37 00
W www.elivi.eu
M elivi@elivi.eu


Visit our website:

Imported and distributed by CBK Distribusjon AS